





CUBIC-8000 Low Voltage Switchgear

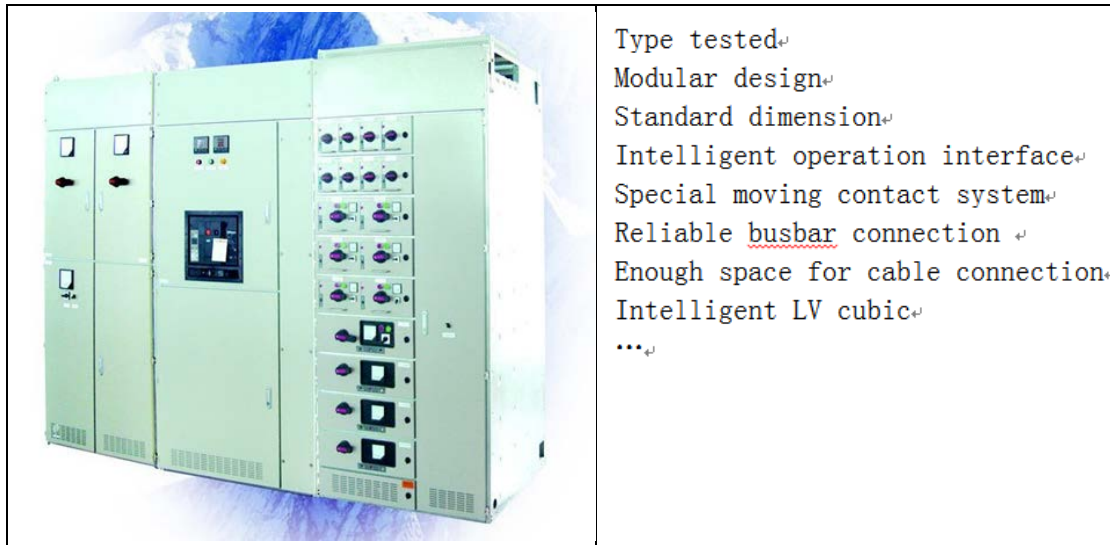

2-3M drawer



1M drawer



1/2M drawer

Technical specification

Item	Unit	Data	
Rated working voltage	V	380	690
Rated insulation voltage	V	660	1000
Frequency	Hz	50	
1 min power frequency withstand voltage	V	2500	3500
Rated impulse withstand voltage	V	6000	8000
Horizontal busbar	Rated current	800- 6000	
	Rated short-time withstand current	50 , 65, 80 , 100	
	Rated peak withstand current	105 , 143, 176 , 220	
Vertical busbar	Rated current	630 , 800 , 1000 , 1200 , 1400	
	Rated short-time withstand current	50 , 80,	
	Rated peak withstand current	105 , 176,	
Degree of enclosure protection		IP40-IP54	
Overall dimension (H×W×D)		2300(2200)× 600× 1000, 2300(2200)× 800× 1000(800) 2300(2200)× 1000× 1000(800)	